



Fire Resistant Mortar

Trade Name: ASTRO FM COMPOUND


FEATURES

Fire Resistant Mortar - BS476: Part 20

EN1366-3
Up to 6 hours fire resistance
for floors & walls
Environmentally friendly
Withstands cracking & shrinking under fire
conditions
NHBC Type Approval

Certifire Approval

NHBC
TYPE APPROVAL

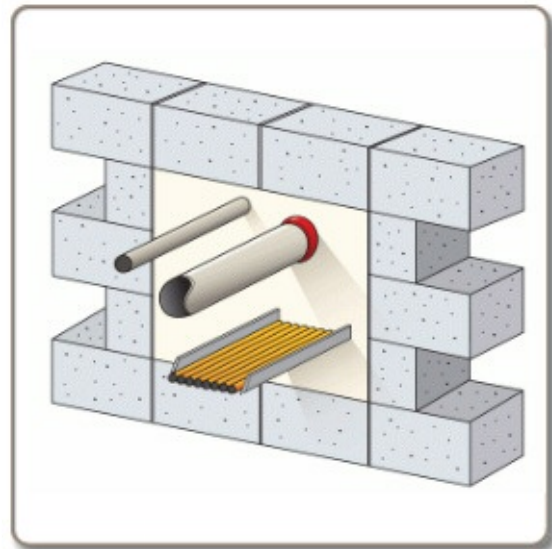

Description

A gypsum based fire resistant mortar which expands when activated by water and sets to form an excellent seal around cables, pipes and duct penetrations in walls and floors.

Additional services can be easily added through the mortar and resealed with further mortar. Where plastic pipes pass through the mortar, Astroflame Pipe Wraps should be used.

Tested to BS476: Part 20 Astroflame Fire Resistant Mortar can provide up to 6 hours fire resistance depending on depth/width and volumetric area.

Packing

Available in 20kg bags

To Order & Specify

Please quote Quantity / Trade Name / Product Code / Weight
Typical wording - 20 / ASTRO FM COMPOUND / AFFC / 20kilo

Fire Test or Assessment Reports

BS476 Part 20: 1987
EN1366-3
NHBC Type Approval.

Health and Safety

This product contains no fibres, halogens, silicone, solvents or added silica; we recommend that dust masks, gloves

and eye protection be worn when handling/mixing the product. Normal good industrial and personal hygiene practises should be observed.

Installation

Instructions supplied with product or please refer to the online installation guide

Related Documents

[COSHH Data](#) [Installation](#)

As part of our policy of ongoing improvements, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as ASTROFLAME FIRESEALS LTD has no control over the installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.

The above information to the best of our knowledge is true and accurate and based upon current test data and is supplied for your guidance only. Customers should satisfy themselves to the suitability of the product in its intended use and no guarantee is given or implied since the conditions of actual use are beyond our control. ASTROflame (Fireseals) Ltd, disclaim any liability for loss, damage or other expense arising from the use of information, data or products mentioned or referred to and reserve the right to change any details or specifications without notice.



Astroflame (Fire Seals) Ltd. Intumescent House
Unit 8, The IO Centre, Stephenson Road, Segensworth
FAREHAM, ENGLAND PO15 5RU

tel 0800 023 2482
(01329 844500)

fax 0800 023 2483
(01329 844600)

intl
tel +44 1329 844500

fax +44 1329 844600

email sales@astroflame.com

[Homepage.](#)